



# IQ System Controller 3/3G

The Enphase IQ System Controller 3/3G connects the home to grid power, the IQ Battery system, and solar PV. It provides microgrid interconnect device (MID) functionality by automatically detecting and seamlessly transitioning the home energy system from grid power to backup power in the event of a grid failure. It consolidates interconnection equipment into a single enclosure and streamlines grid-independent capabilities of PV and storage installations by providing a consistent, pre-wired solution for residential applications.



**IQ Series Microinverters**  
The high-powered smart grid-ready IQ Series Microinverters (M Series, IQ6, IQ7, and IQ8 Series) dramatically simplify the installation process.



**IQ Battery 5P**  
Fully integrated AC battery system. Includes six field-replaceable IQ8D-BAT microinverters.



**IQ Combiner 5/5C**  
Consolidates PV interconnection equipment into a single enclosure and streamlines IQ Series Microinverters and IQ Gateway installation by providing a consistent, pre-wired solution for residential applications.



**IQ Load Controller**  
Helps prioritize essential appliances during a grid outage to optimize energy consumption and prolong battery life.

### Easy to install

- Connects to service entrance<sup>1</sup> or main load center
- Includes neutral-forming transformer
- Mounts on single stud with centered brackets
- Provides conduit entry from the bottom, left, or right
- Includes color-coded wires for ease of wiring the System Shutdown Switch
- Integrates hold-down functionality to eliminate the need for hold-down kits and special breakers

### Flexible

- Can be used for Sunlight Backup, Home Essentials Backup, or Full Energy Independence
- IQ System Controller 3 integrates with IQ Battery 5P
- IQ System Controller 3G integrates with select AC standby generators. See the Generator integration with Enphase Energy System tech brief at: <https://enphase.com/installers/resources/documentation/storage> for a list of generators
- Provides a seamless transition to backup

### Safe and reliable

- System Shutdown Switch can be used to disconnect PV, battery, and generator systems
- System Shutdown Switch acts as a rapid shutdown initiator of grid-forming IQ8 PV Microinverters for the safety of maintenance technicians/first responders
- 10-year limited warranty



10-year limited warranty



IQ System Controller 3



IQ System Controller 3G

<sup>1</sup> IQ System Controller 3 is not suitable for use as service equipment in Canada.

# IQ System Controller 3/3G

| MODEL NUMBER  | DESCRIPTION   |
|---|---|
| SC200D111C240US01   | IQ System Controller 3 streamlines the grid-independent capabilities of PV and storage installations. Integrates hold-down capability. Supports IQ Battery 5P units up to 40 kWh (without PCS*) and 80 kWh (with PCS*). <b>Does not support generator integration</b>   |
| SC200G111C240US01   | IQ System Controller 3G streamlines the grid-independent capabilities of PV and storage installations. Integrates hold-down capability. Supports IQ Battery 5P units up to 20 kWh (without PCS*) and 40 kWh (with PCS*). <b>Supports generator integration</b>  |
| WHAT'S IN THE BOX   |   |
| IQ System Controller 3/3G   | Includes neutral-forming transformer (NFT) and microgrid interconnect device (MID)  |
| System Shutdown Switch  | Includes pre-wired red, black, orange, and purple 12 AWG wire (EP200G-NA-02-RSD)  |
| Wall-mounting bracket   | Screws provided in the accessories kit for mounting   |
| 4-pole circuit breaker  | Pre-installed quad breaker (BRK-20A40A-4P-240V), 20 A-40 A, 10 kAIC, Eaton BQC220240 <sup>2</sup>   |
| Accessories kit   | IQ System Controller 3/3G literature kit, including labels, CTRL headers, screws, filler plates, and Quick Install Guide (QIG) (EP200G-LITKIT)  |
| OPTIONAL ACCESSORIES AND REPLACEMENT PARTS  |   |
| CT-200-SPLIT  | 200 A split-core current transformers for metering (accuracy: $\pm 2.5\%$ ) <sup>3</sup>  |
| CT-200-CLAMP  | 200 A clamp-type current transformers for metering (accuracy: $\pm 2.5\%$ ) <sup>3</sup>  |
| Main or load circuit breakers (order separately, as needed) <sup>4</sup>                      | <ul style="list-style-type: none"> <li>BRK-100A-2P-240V: 2-pole, 100A, 25kAIC, CSR2100N or CSR2100</li> <li>BRK-125A-2P-240V: 2-pole, 125A, 25kAIC, CSR2125N</li> <li>BRK-150A-2P-240V: 2-pole, 150A, 25kAIC, CSR2150N</li> <li>BRK-175A-2P-240V: 2-pole, 175A, 25kAIC, CSR2175N</li> <li>BRK-200A-2P-240V: 2-pole, 200A, 25kAIC, CSR2200N</li> </ul> |
| Distributed energy resource (DER) circuit breakers (order separately, as needed) <sup>5</sup> | <ul style="list-style-type: none"> <li>BRK-20A-2P-240V-B: 2-pole, 20 A, 10 kAIC, BR220B/BR220</li> <li>BRK-30A-2P-240V-B: 2-pole, 30 A, 10 kAIC, BR230</li> <li>BRK-40A-2P-240V-B: 2-pole, 40 A, 10 kAIC, BR240B/BR240</li> <li>BRK-60A-2P-240V: 2-pole, 60 A, 10 kAIC, BR260</li> <li>BRK-80A-2P-240V: 2-pole, 80 A, 10 kAIC, BR280</li> </ul>       |
| EP200G-HNDL-R1  | IQ System Controller 3/3G installation handle kit (order separately)  |
| CTRL-SC3-NA-01  | Control cable, 500 ft. spool (order separately)   |
| BRK-20A40A-4P-240V  | 2-Pole 20 A, 2-Pole 40 A, 10kAIC, Quad Breaker BQC220240 <sup>6</sup>   |
| ALTERNATE DER CIRCUIT BREAKERS  |   |
| GE/ABB  | THQL21xx (20/40/60/80 A)  |
| Siemens   | Q2xx (20/40/60/80 A)  |
| Siemens (quad breaker)  | Q24020CT2 (20/40 A)   |
| ELECTRICAL SPECIFICATIONS   |   |
| Nominal voltage/Range (L-L)   | 240 V <sup>7</sup> / $\pm 20\%$   |
| Voltage measurement accuracy  | $\pm 1\%$ V nominal ( $\pm 1.2$ V L-N and $\pm 2.4$ V L-L)  |
| Auxiliary (dry) contact for load control, excess PV control, and generator two-wire control   | 24 V, 1 A   |
| Nominal frequency/Range   | 60 Hz/56–63 Hz  |
| Frequency measurement accuracy  | $\pm 0.1$ Hz  |
| Maximum continuous current rating   | 160 A   |
| Maximum input overcurrent protection device   | 200 A   |
| Maximum output overcurrent protection device  | 200 A   |
| Maximum overcurrent protection device rating for generator circuit                            | 80 A (IQ System Controller 3G only - SC200G111C240US01)   |

<sup>2</sup> Factory-installed quad breaker (Siemens or Eaton). NFT pre-wired to 40 A terminal of the quad breaker.

<sup>3</sup> Two units of CT-200-SPLIT or CT-200-CLAMP must be bought separately for generator integration.

<sup>4</sup> The IQ System Controller 3 is rated at 22 kAIC.

<sup>5</sup> Integrated hold-down kit support breakers (BR230/BR230/BR240) without predrilled hole.

The integrated hold-down kit also supports GE/ABB and Siemens as mentioned in the "Alternate DER circuit breakers" section.

<sup>6</sup> Figures 1A and 1B show Siemens or Eaton factory-installed quad breakers with NFT pre-wired to 40 A.

<sup>7</sup> "-" indicates alternating current (AC) supply.

\* Power control system.

| ELECTRICAL SPECIFICATIONS   |   |  |
|---|---|--|
| Maximum overcurrent protection device rating for storage circuit  | 2 × 80 A (IQ System Controller 3 - SC200D111C240US01)<br>1 × 80 A (IQ System Controller 3G - SC200G111C240US01)   |  |
| Maximum overcurrent protection device rating for PV combiner unit | 80 A  |  |
| Internal busbar rating  | 200 A   |  |
| Neutral-forming transformer (NFT)                                 | <ul style="list-style-type: none"> <li>Breaker rating (pre-installed): 40 A between L1 and Neutral; 40 A between L2 and Neutral</li> <li>Continuous rated power: 3,600 VA</li> <li>Maximum continuous unbalance current: 30 A @ 120 V</li> <li>Peak unbalanced current: 80 A @ 120 V for two seconds</li> </ul> |  |
| MECHANICAL DATA   |   |  |
| Dimensions (W × H × D)  | 50 cm × 91.6 cm × 24.6 cm (19.7 in × 36 in × 9.7 in)  |  |
| Weight  | 39.4 kg (87 lb)   |  |
| Ambient temperature range   | -40°C to 50°C (-40°F to 122°F)  |  |
| Cooling   | Natural convection and a heat shield  |  |
| Enclosure environmental rating                                    | Outdoor, NEMA type 3R, polycarbonate construction   |  |
| Maximum altitude  | 2,500 m (8,200 ft)  |  |
| WIRE SIZES  |   |  |
| Connections<br>(All lugs are rated to 90°C)                       | Main lugs and backup load lugs<br>CSR breaker bottom wiring lugs<br>AC combiner lugs, IQ Battery lugs, and generator lugs<br>Neutral (large lugs)   | Cu/Al: 6 AWG–300 kcmil<br>Cu/Al: 2 AWG–300 kcmil<br>14 AWG–2 AWG<br>Cu/Al: 6 AWG–300 kcmil |
| Neutral and ground bars   | Large holes (5/16–24 UNF)<br>Small holes (10–32 UNF)  | 14 AWG–1/0 AWG<br>14 AWG–6 AWG   |
| COMPLIANCE  |   |  |
| Compliance (under progress)                                       | UL 1741, UL 1741 SA, IEEE 1547:2018 (UL 1741-SB, 3rd Ed.), UL 1741 PCS CRD, UL1 998, UL 869A, UL 508 <sup>8</sup> , UL 50E <sup>8</sup><br>CSA 22.2 No. 107.1, 47 CFR Part 15 Class B, ICES 003, ICC ES AC156<br>The IQ System Controller 3/3G is approved for use as service equipment in the United States    |  |
| WARRANTY  |   |  |
| Limited warranty (restrictions apply)                             | Up to 10 years (EP200G-NA-02-RSD has a 5-year warranty)   |  |
| COMPATIBILITY <sup>9</sup>  |   |  |
| Battery   | IQ Battery 5P (IQBATTERY-5P-1P-NA)  |  |
| Microinverters  | IQ8, IQ7, IQ6, and M Series Microinverters <sup>10</sup>  |  |
| IQ Combiner   | IQ Combiner 5/5C (X-IQ-AM1-240-5C, X-IQ-AM1-240-5)  |  |
| Communications Kit 2  | COMMS-KIT-02  |  |

<sup>8</sup> Sections from these standards were used during the safety evaluation and included in the UL 1741 listing.

<sup>9</sup> For more details, refer to the IQ System Controller 3/3G Quick Install Guide.

<sup>10</sup> M Series Microinverters can only be supported in states that have not yet adopted IEEE 1547:2018.

Enphase does not support mixing IQ8 Series Microinverters with other series on the same IQ Gateway.

Figure 1A: Installing DER breakers for IQ8 System without generator

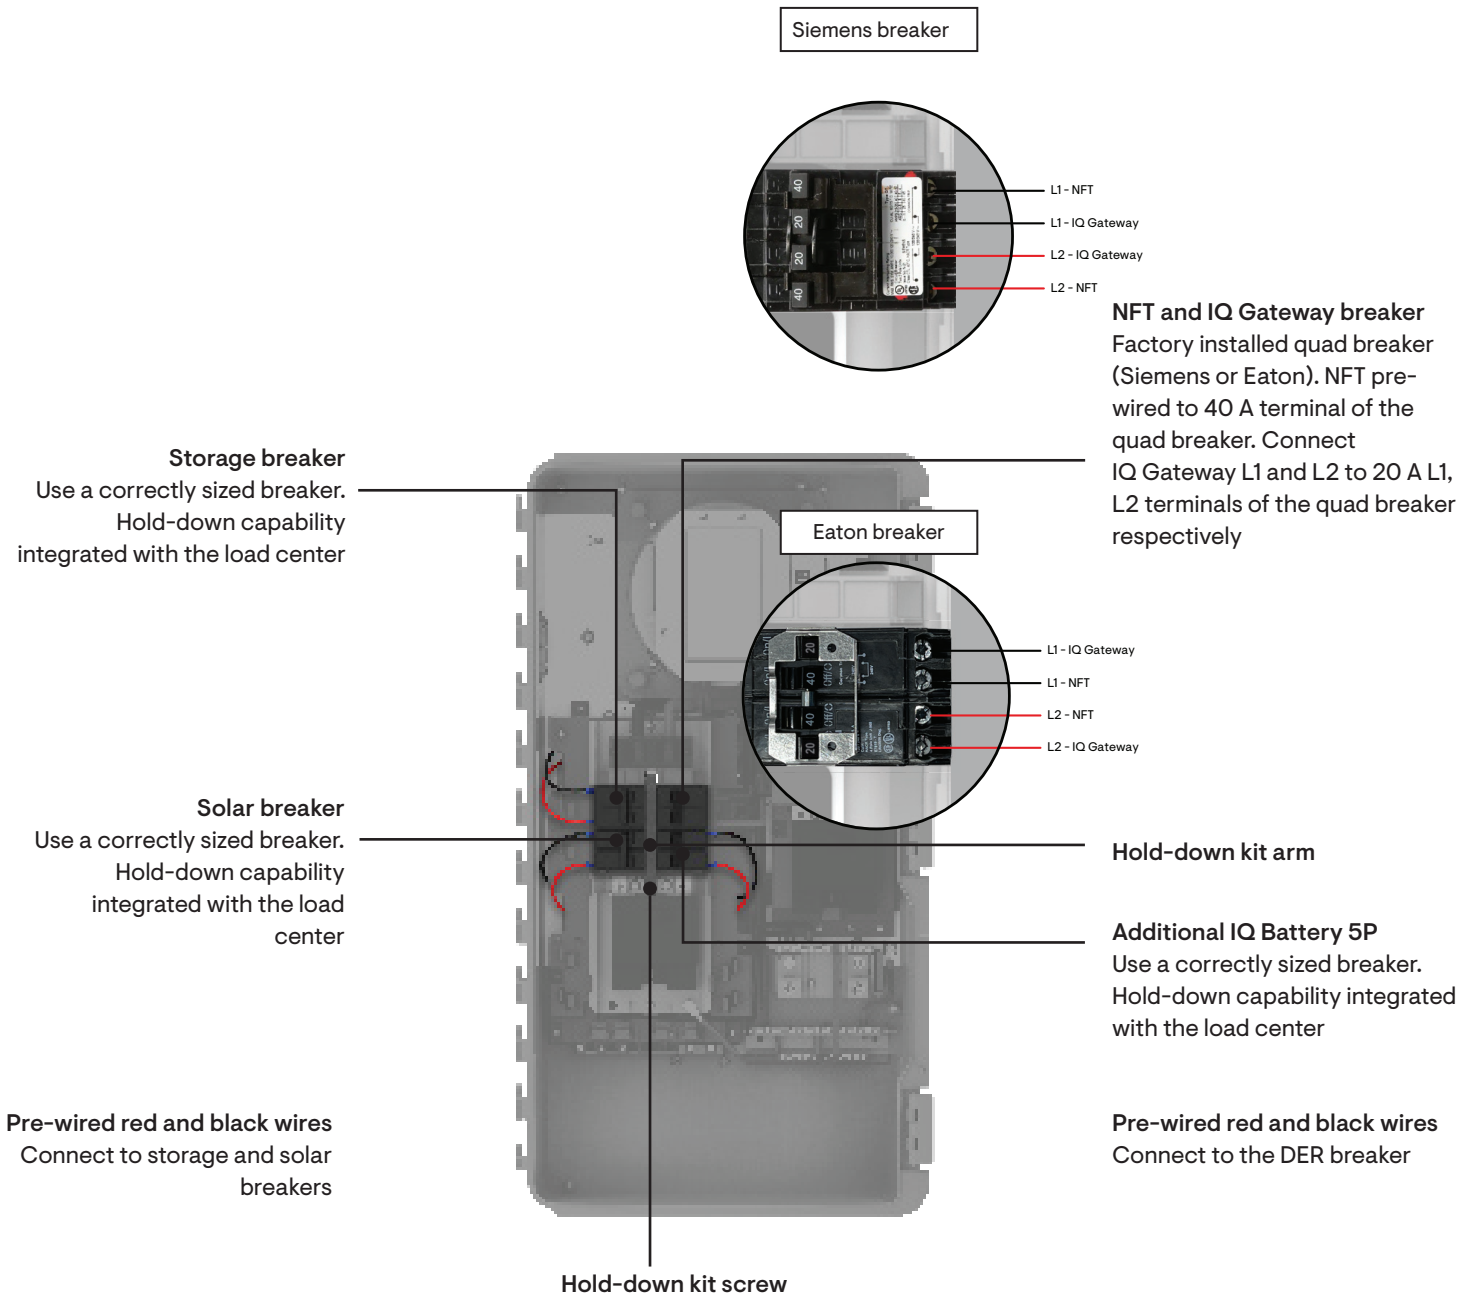


Figure 1B: Installing DER breakers for IQ8 System with generator



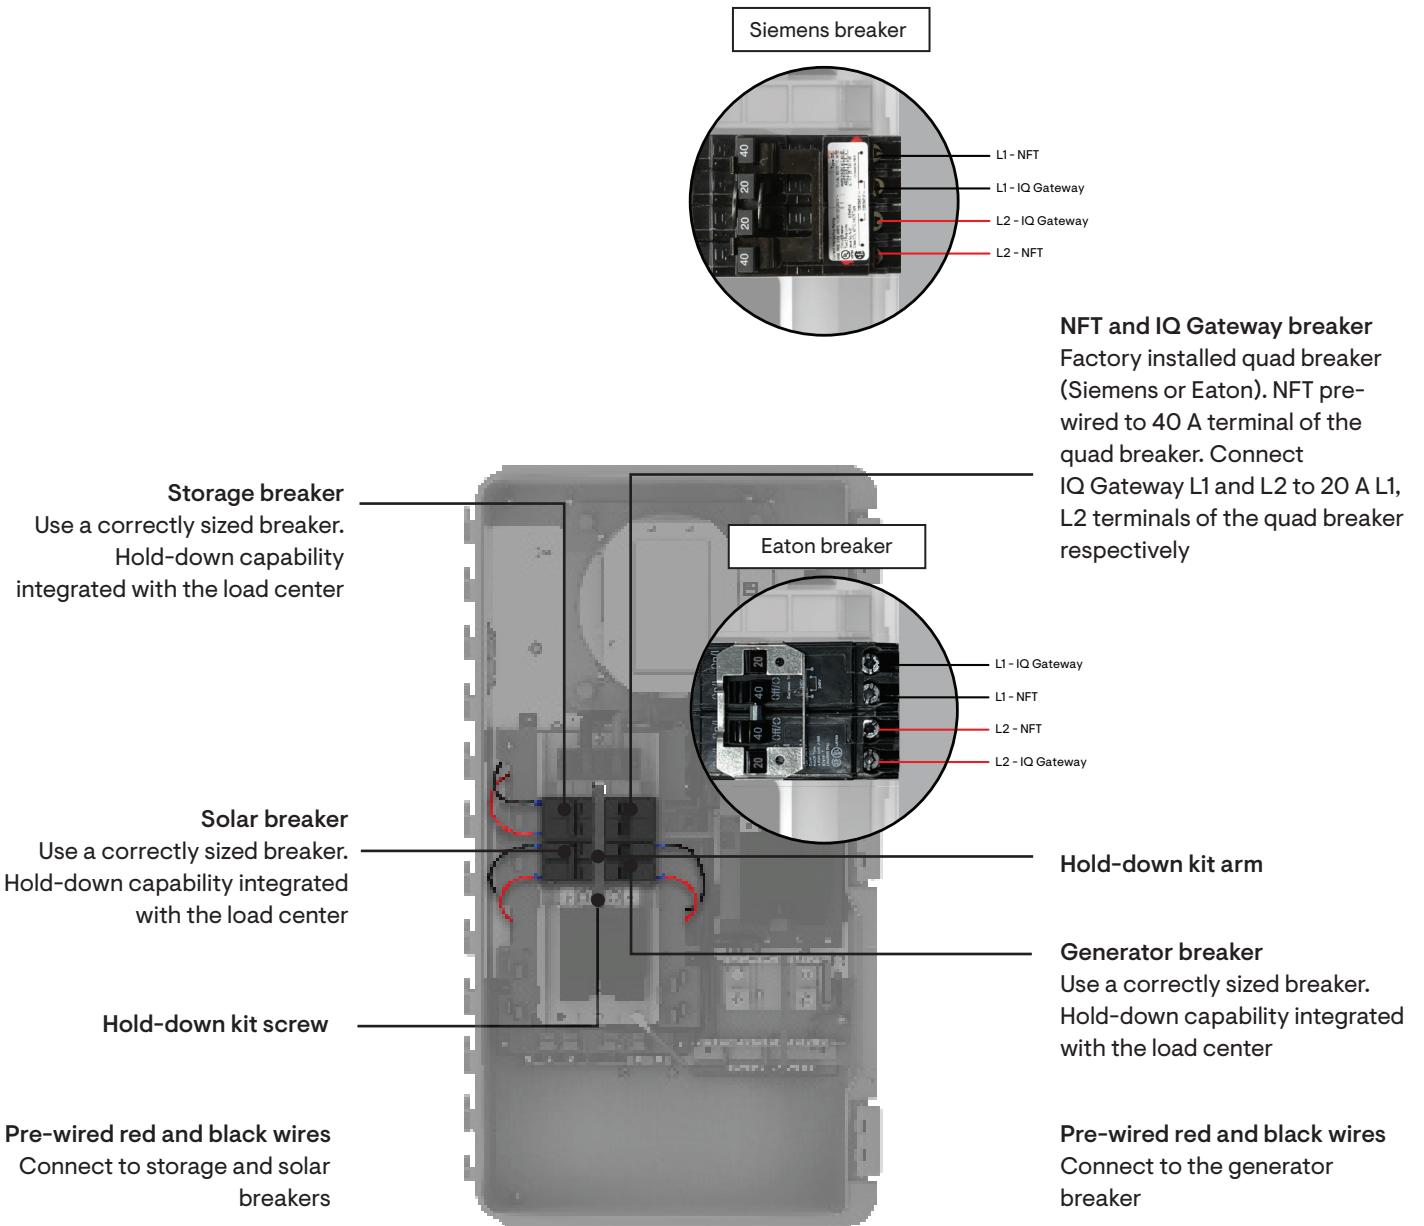


Figure 2: Wiring the System Shutdown Switch

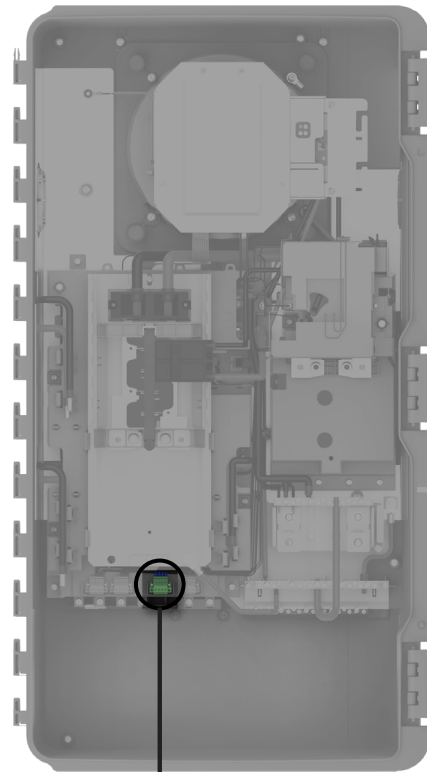

Wiring for systems with IQ8 Microinverters

Wiring for systems with non-IQ8 Microinverters

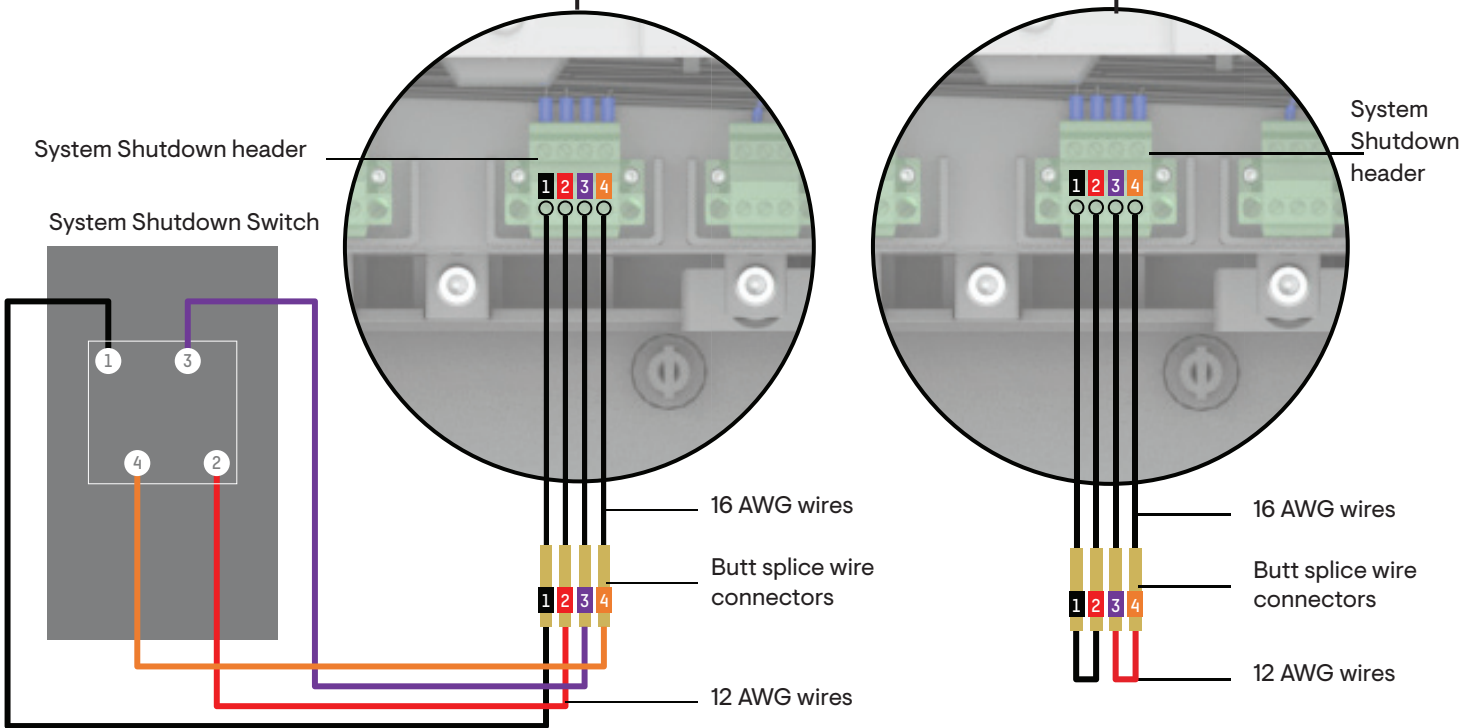

# Revision history

| REVISION      | DATE        | DESCRIPTION  |
|---------------|-------------|--|
| DSH-00021-4.0 | May 2024    | Updated the section "Optional accessories and replacement parts" and the UL certification. |
| DSH-00021-3.0 | August 2023 | Updated the section "Optional accessories and replacement parts".                          |
| DSH-00021-2.0 | July 2023   | Added new section "Alternative breakers for Eaton load center".                            |
| DSH-00021-1.0 | May 2023    | Initial release.   |