

Anker A1755

Anker SOLIX C800X Portable Power Station

768Wh | 1200W

InfiniPower™ SurgePad™

**HYPER
FLASH**™ TotalGuard™

*Ever Ready for Camping Trips with
a 5-in-1 Portable Power Station*



Highlights

InfiniPower™ 10 Years of Everyday Use

LiFePO4 batteries offer a 6x longer lifespan than the average power station. Designed for a decade of daily use, with an industry-leading 5-year device warranty

Ever-Ready Professional Camping Lights

Features a 3-mode camping light, including a flashlight, ambient light, and warm-toned light in one portable power station. With its IP65-rated water-resistant build and auto-recharging storage compartment, get reliable light for all your camping activities at night.

Strong Enough to Power 89% of Outdoor Appliances

Increase surge power by 50% to run most appliances while camping or during power outages. Charge an iPhone 13 up to 49 times, a kettle or coffee maker (1000W) for 41 minutes, an electric stove (800W) for 52 minutes, or a CPAP machine for 17 hours.

HyperFlash™ Fast Recharge

Thanks to HyperFlash™ technology, the portable power station can be recharged to 100% in 58 minutes via a wall outlet with a 1100W input, which is 17% faster than power stations with the same capacity.

Remote operation is hassle-free indoors and outdoors with Wi-Fi and Bluetooth

Using the Anker app, you can monitor and control the Anker SOLIX C800X Portable Power Station with real-time visuals and set your preferred discharge limit, battery level, recharging speed, AC timing, screen brightness, and screen time.

Features

Proven Durability TotalGuard™

Our drop-proof design and material selection meet the requirements of industry testing standards to withstand any impact during outdoor adventures.

Pro UPS

Ensure continuous power with Uninterruptible Power Supply (UPS)
Switchover time in under 20ms.

Professional Camping Lights

Features a 3-mode camping light in one portable power station. With its IP65-rated water-resistant build and auto-recharging storage compartment.

Specifications

Product Model

PN	A1755
Model Name	Anker SOLIX C800X Portable Power Station

Battery Info

Type of Battery	LiFePO4
Capacity	768Wh
Capacity	240000mAh
Cycle Life	3000+ (to 80%)



Specifications

Power Outputs

Maximum Output	1200W
----------------	-------

# of Output Ports	10 (For US/CA)
-------------------	----------------

# of Standard AC Socket	5 (For US/CA)
-------------------------	---------------

AC Rated Power	1200W
----------------	-------

AC Surge Power	1920W
----------------	-------

AC Auto Shut-Off	Standby mode 12h
------------------	------------------

# of USB-A Output	2
-------------------	---

USB-A Rated Power (per port)	5V=2.4A (12W Max)
------------------------------	-------------------

USB-A Total Output	24W
--------------------	-----

# of USB-C Output	2
-------------------	---

USB-C Rated Power (per port)	5V=3A/ 9V=3A/ 12V=2.5A (30W Max) 5V=3A/9V=3A/ 15V=3A/20V=3A/20V=5A (100W Max)
------------------------------	---

USB-C Total Output	130W
--------------------	------

USB auto shut-off	Yes
-------------------	-----

# of Car Outlet	1
-----------------	---

Car Outlet Rated Power (per port)	10.8~14V=10A (120W Max)
-----------------------------------	-------------------------

Specifications

Power Inputs

Input Voltage	100-120V (US/CA)	EST DC Adapter Recharge Time	7.2 hrs (120W Car Charger)
Total Input Power	1100W (AC Direct) Default AC recharging: 90min(750W) Ultra Fast AC recharging: 58min(1100W) Car socket recharging: 7.2h(120W) Solar recharging: 2.8h(300W)	DC Input Size	XT-60
EST Recharge Time		Solar Input Power	11-60V \pm 10A(300W Max)
Use Ports While Recharging	Yes		8.3 Hours(1*100W) 4.2 Hours(2*100W) 2.8 Hours(3*100W)
Direct AC Input	Yes	EST Solar Recharge Time	4.2 Hours(1*200W)
Maximum AC Input Power	1100W	Solar Panel Compatible	Yes
# of DC Input	1	MPPT Support	Yes
DC Adapter	No		

Sales Market: US/CA

Specifications

Illumination Information

Flash Light	-
Flash Light Mode	-
Ambient Light	Yes
Ambient Light Mode	Ambient Light Mode (3 Level) SOS Mode

Safety Information

Operation Temperature (°C/°F)	Charging: -20 -40°C / -4 -104°F Recharging: 0-40°C / 32-104°F
Overload Protection (AC)	>1920W
Over-current Protection (USB-A)	>2.4A
Over-current Protection (USB-C)	>3.6A (30W) >6A (100W)
Over-current Protection (Car Port)	>10A

Package Content


AC Adapter	-
Cable	AC Charging Cable 120cm Car Charging Cable 300cm Solar Charging Cable (1 to 2) 170cm

Weight & Dimension

Product Dimension	371x205x253 mm 14.6x8.07x9.96 in
Packaging Dimension	451x274x300mm 17.8x10.8x11.8 in
Product Weight	10.5 kg ; 23.15 lb
Product Weight with Package	12kg ; 26.46 lb

Specifications

*A1754 Only

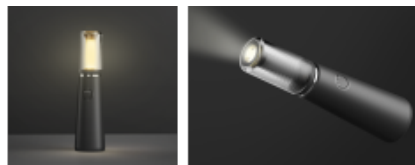

Light Information

3-in-1 Light Modes	Flash Light mode / Candle light mode Ambient light mode
Brightness	200lm Max
Battery Capacity	2600mAh
Run Time	8-130hrs
Recharge Time	4hrs
Waterproof Level	IP65
Size	140*36*36mm
Weight	115g

Hanger Pole Information

2-IN-1 design	Lantern Stand / Pole Tripod
SPEC	Length: 100cm Max / Weight: 142g