

“Stay Connected” with





Solar Power Components

a PennEngineering® Company


## HEYClip™ SunRunner® Cable Clips for 4 Cables

Double-Compression, Straight-thru Design

PANEL THICKNESS CLAMPING RANGE				WIRE DIAMETER RANGE	PART NO. 410 Stainless	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum in.	Maximum in.	Minimum mm.	Maximum mm.				A x B in.	mm.	C in.	mm.
<b>SunRunner 4 Clip</b> - for panels up to .125" (3,2 mm) thick										
.06	1,4	.13	3,2	.20" (5,1 mm) - .30" (7,6 mm)	S6443	SunRunner® 4 Clip 100 Pack	1.34 x	33,8 x	.36	9,1
					S6483	SunRunner® 4 Clip Bulk	.50	12,7		
<b>SunRunner 4 EZ Clip</b> - for panels up to .250" (6,4 mm) thick										
.13	3,2	.25	6,4	.20" (5,1 mm) - .30" (7,6 mm)	S6400	SunRunner® 4 EZ Clip 100 Pack	1.33 x	33,8 x	.36	9,1
					S6440	SunRunner® 4 EZ Clip Bulk	.50	12,7		



SunRunner® 4





SunRunner® 4 EZ

## HEYClip™ SunRunner® 2 x 2 Cable Clips for 4 Cables

Double-Compression, Straight-thru Design

PANEL THICKNESS CLAMPING RANGE				WIRE DIAMETER RANGE	PART NO. 410 Stainless	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum in.	Maximum in.	Minimum mm.	Maximum mm.				A x B in.	mm.	C in.	mm.
.03	0,8	.08	2,0	.26" (6,6 mm) - .33" (8,4 mm)	S6565	SunRunner® 2x2 Clip 100 Pack	.90 x	22,9 x	.70	17,8
					S6566	SunRunner® 2x2 Clip Bulk	.86	21,8		

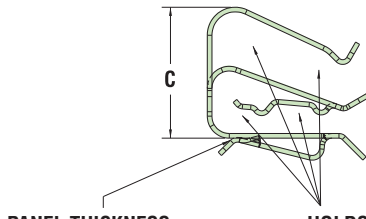

PANEL THICKNESS .03" (0,8 mm) - .08" (2,0 mm)

HOLDS FOUR CABLES OF EQUAL DIAMETER (2 IN TOP SECTION, 2 IN LOWER SECTION)

	SunRunner 4, 4 EZ	SunRunner 2 x 2
Material	.020" thick 410 stainless steel	.025" thick 410 stainless steel
Certifications	Certified by UL for Compliance with both Canadian and US Requirements under File E54523	
Temperature Range	-40°F (-40°C) to 572°F (300°C)	



- Heyco's SunRunner and SunRunner EZ's robust "double-compression" design securely holds up to two (2) cables from .20" (5,1 mm) to .30" (7,6 mm) in diameter.
- SunRunner 4 and SunRunner 4 EZ have a screwdriver slot for easy removal or movement of clips.
- SunRunner 4 and SunRunner 4 EZ are constructed from .020" thick heat treated 410 stainless steel for excellent strength and corrosion protection for outdoor exposure.
- **SunRunner EZ's are designed for thicker module frames** as well as racking – accommodates profiles up to .250" (6,4 mm) thick!
- DFARS Compliant.



- The New Heyco SunRunner 2 x 2 Clip features a compact design for holding up to four (4) cables at one time, with a smaller footprint in comparison to other Heyco clips for 4 cables.
- Also features our new Short Flange design for attaching to newer modules with smaller frames.
- Minimum flange depth requirement of only 10 mm holds as tight as other clips in our popular Sunrunner Series.
- Heyco SunRunner Clips are designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Generous lead-in for installation without tools.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Not for use in salt water environments.
- UL Pending.